




Class Sails - headsail cover measurement support

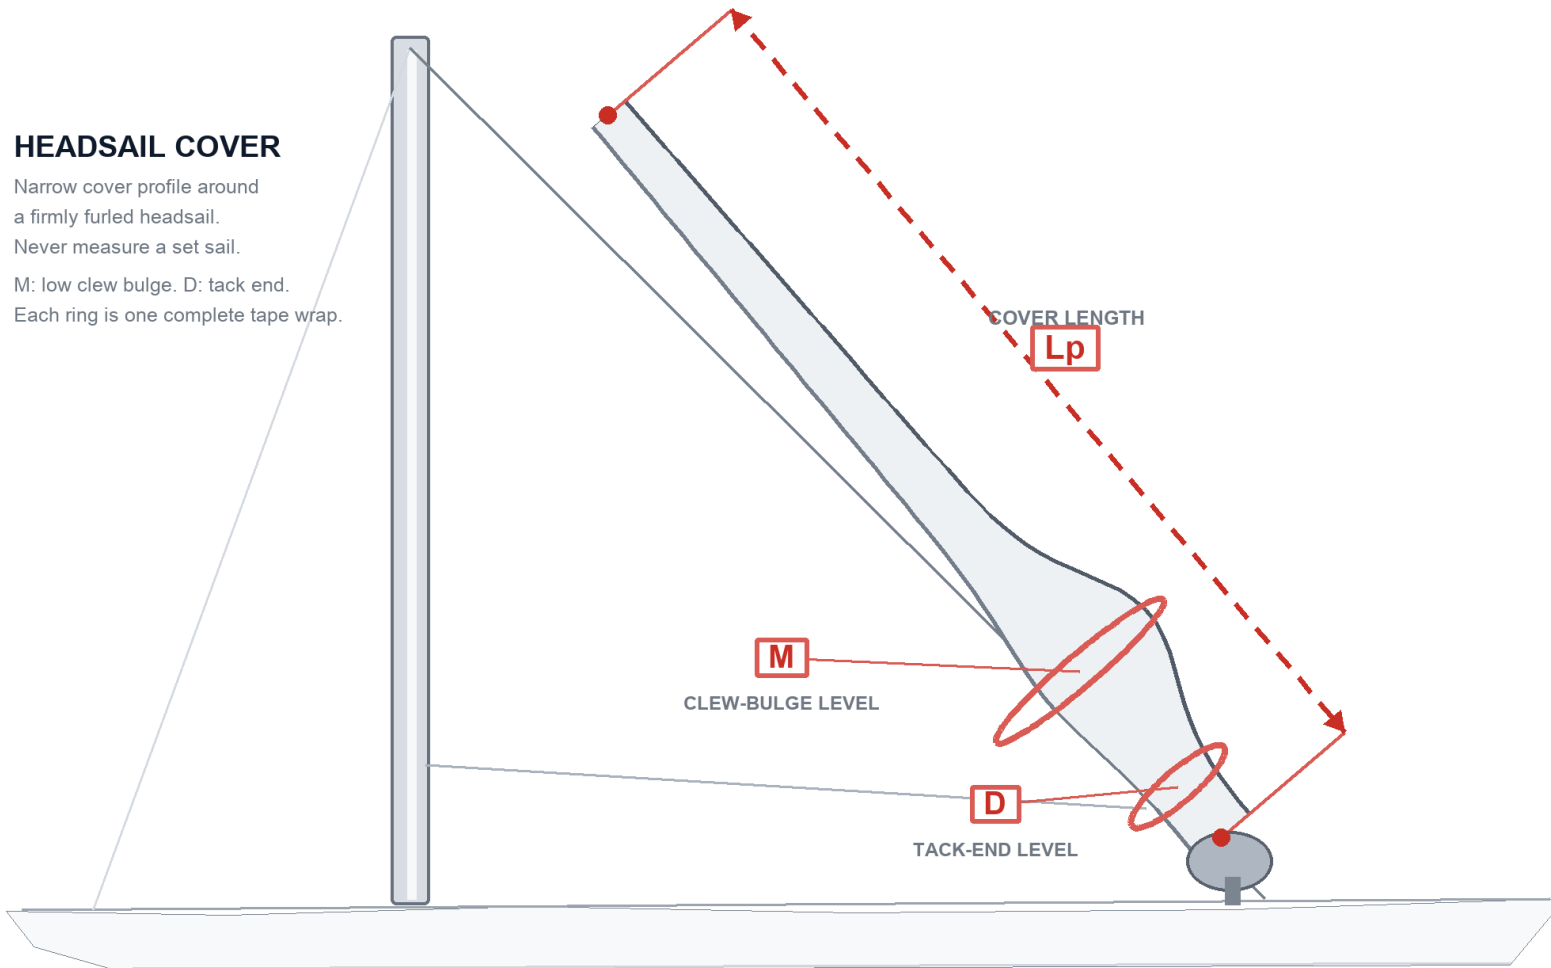

HEADSAIL COVER WORKSHEET

CS-HC-01 - Page 2 of 2

Name	Email / phone	Order no.	Boat make / model	LOA	LOA unit	Date

Measurement condition

If a cover is fitted, remove it. Measure the bare headsail firmly furled on the foil as shown on page 1. Lp is straight between the shown endpoints; D and M are complete circumference wraps.

COVER SPECIFICATION

Sail / cover description

Fabric colour

Closure / zip notes

☐

Measured bare sail firmly furled

☐

Measurement photo supplied

Tape placement

Wrap the tape directly around the bare furled sail, never over an old cover. Lp is a straight bearing-point distance. D is the full tack-level wrap; M is the full clew-level wrap at the low bulge shown.

Notes

HEADSAIL-COVER MEASUREMENTS (CM)

Lp

Straight luff length between the two shown endpoints

cm

D

Full tack-level circumference

cm

M

Full clew-level circumference

cm

Review gate

Class Sails checks these values against the boat, furler and supplied photos before confirming production dimensions.

Date and signature