




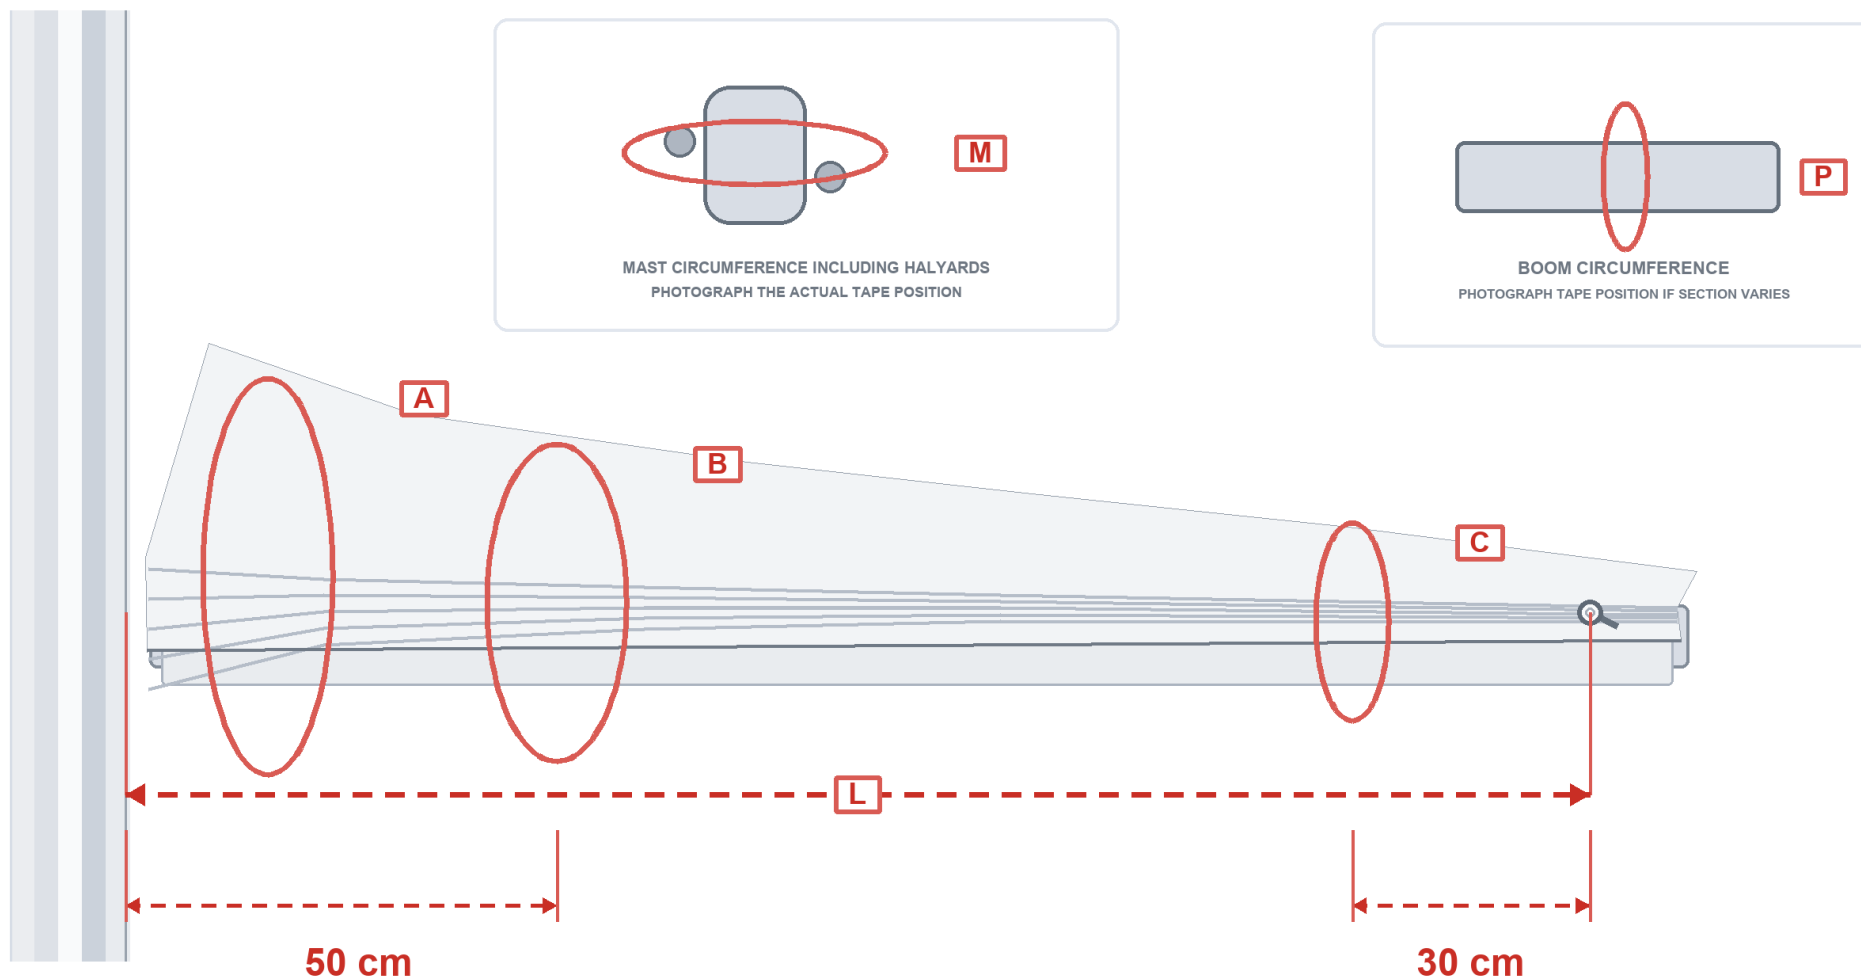

MAINSAIL COVER WORKSHEET

CS-MC-02 - Page 2 of 2

Name	Email / phone	Order no.	Boat make / model	LOA	LOA unit	Date

Measurement condition

Lower and stow the mainsail exactly as it is normally covered, then remove any existing cover. Pull the tape taut without visibly changing the packed bulk. If the packed shape varies, include A/B/C tape-position photos for review.

COVER SPECIFICATION

Description

Fabric colour

Headboard width, fwd-aft (cm)

Mainsail style

Semi full

Full batten

Cover construction / closure notes

Logo or text position

Notes / photos sent

COVER MEASUREMENTS (CM)

A Full wrap at packed-sail front, with boom and headboard cm

B Full wrap 50 cm aft of the aft face of mast, with boom cm

C Full wrap 30 cm forward of clew bearing, with boom cm

L Aft face of mast to mainsail clew bearing on boom cm

M Mast circumference including halyards cm

P Boom circumference; photograph tape position if section varies cm

Date and signature